

Flat plastic spring

1/2

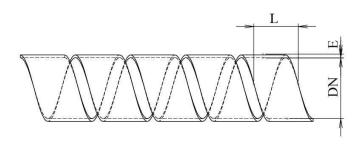



Very resistant to shocks and frictions

Temperature: -20°C to +80°C

Material: PVC

Part no	DN	Thickness (mm)	LENGTH (M)	PITCH
AMUELLE P12	12	1	50	8
AMUELLE P13	13	1	50	16
AMUELLE P15	15	1	50	16
AMUELLE P16	16	1	50	16
AMUELLE P17	17	1	50	16
AMUELLE P18	18	1	50	16
AMUELLE P20	20	1	50	16
AMUELLE P21	21	1	50	16
AMUELLE P22	22	1	50	16
AMUELLE P25	25	1	50	16
AMUELLE P28	28	1	50	16
AMUELLE P30	30	1	50	16
AMUELLE P33	33	2	20	16
AMUELLE P35	35	2	20	16
AMUELLE P38	38	2	20	16
AMUELLE P40	40	2	20	16
AMUELLE P45	45	2	20	16
AMUELLE P48	48	2	20	16
AMUELLE P50	50	2	20	16
AMUELLE P55	55	2	20	16
AMUELLE P60	60	2	20	16

Printed on: 03/08/2024 at 04:21

Flat plastic spring



2/2

Part nº	DN	Thickness (mm)	LENGTH (M)	PITCH
AMUELLE P70	70	2	20	16
AMUELLE P80	80	2	15	16

Printed on: 03/08/2024 at 04:21